


S:\Engineering\Roadway Standards\2010 Roadway Standards for Publish\Drawings\DWGs\C100-D700.dwg

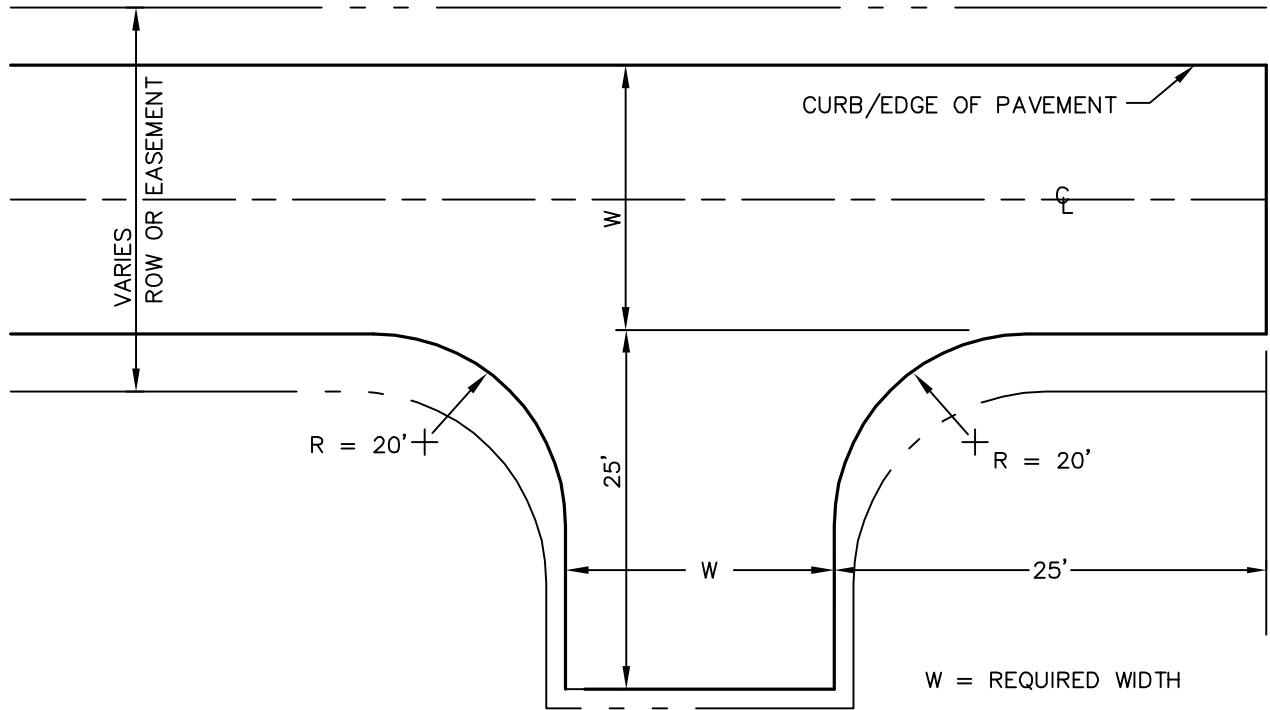

NOTES

1. TURNAROUND CAN BE ON EITHER SIDE OF STREET.
2. THIS PASSENGER TURNAROUND SHALL BE A MINIMUM OF 20' WIDE OR THE WIDTH OF THE ROAD, WHICHEVER IS GREATER.
3. CURBS SHALL BE MARKED FOR "NO PARKING - FIRE LANE." CURBS ON PUBLIC AND COUNTY ROADS SHALL BE MARKED YELLOW WITH 4" THERMOPLASTIC. CURBS ON PRIVATE ROADS SHALL BE PAINTED RED AND SIGNED "NO PARKING - FIRE LANE."
4. IF NO CURBS ARE PRESENT, STREETS SHALL BE POSTED "NO PARKING - FIRE LANE" AS PER THE MUTCD, 50 FEET ON CENTER.

REVISION	DATE	BY

DEPARTMENT OF TRANSPORTATION  
AND DEVELOPMENT  
150 BEAVERCREEK ROAD  
OREGON CITY, OR 97045



APPROVAL DATE: 1/1/10

SCALE: N.T.S.

**PASSENGER VEHICLE  
TURNAROUND**

STANDARD  
DRAWING

**C220**