



S:\Engineering\Traffic\Projects\Current Projects\RoadwayStandards\RoadwayStandards\Standard Drawings\Standard Drawings Revised S100-S960.dwg

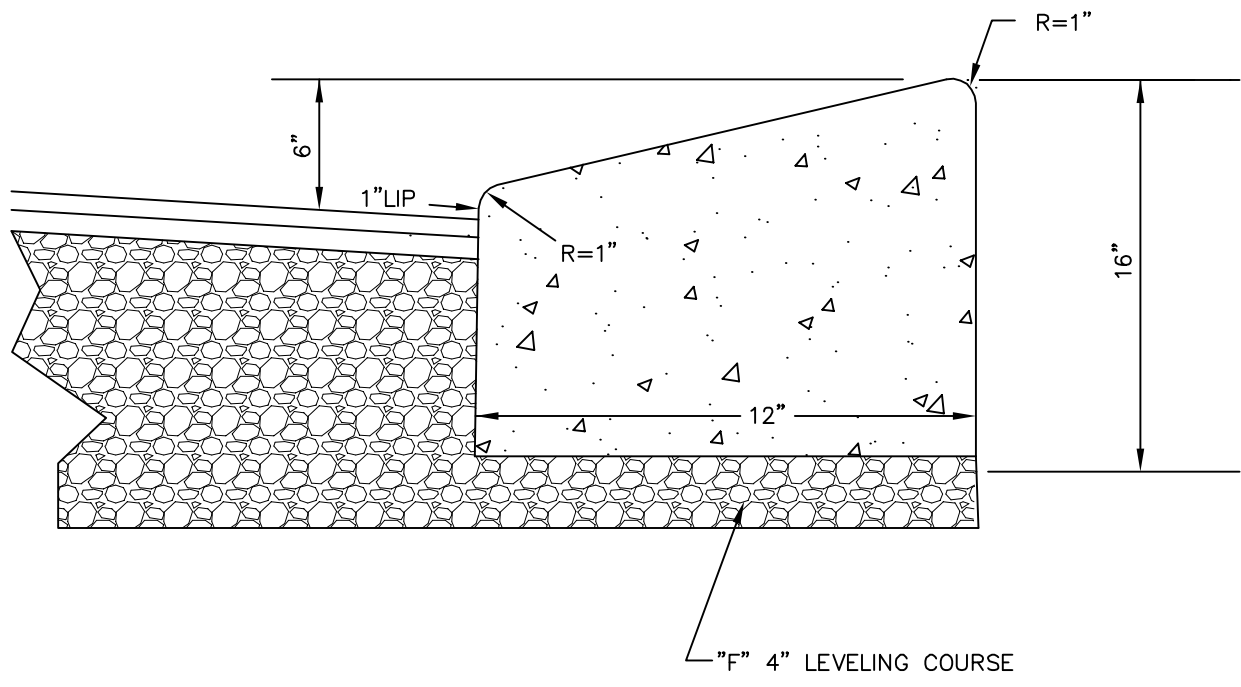

NOTES

1. SPECIFICATIONS FOR CONCRETE AND MISCELLANEOUS MATERIALS USED IN CONSTRUCTION SHALL CONFORM TO CURRENT ODOT/APWA STANDARD SPECIFICATIONS.
2. CONCRETE SHALL HAVE A MINIMUM COMPRESSIVE STRENGTH OF 3300 PSI IN 28 DAYS, 2" TO 4" SLUMP.
3. WEEP HOLES ARE NOT ALLOWED.
4. EXPANSION JOINTS, MAX. 45' SPACING AND AT BEGINNING AND END OF CURVES OR AS DIRECTED.
5. CONTRACTION JOINTS, MAX. 12' SPACING AND AT LOCATIONS AS DIRECTED.
6. EXPOSURE MAY BE REDUCED TO 4" EXPOSURE TO ACCOMMODATE HIGH TRAFFIC USE UPON COUNTY APPROVAL.
7. SEE NOTES ON DETAIL S100.

REVISION	DATE	BY	DEPARTMENT OF TRANSPORTATION AND DEVELOPMENT 150 BEAVERCREEK ROAD OREGON CITY, OR 97045	 CLACKAMAS COUNTY	APPROVAL DATE: 1/1/10 MOUNTABLE CURB	SCALE: N.T.S.	STANDARD DRAWING S180